

X-Venus Series

TOPCON



Lower Power Temperature Coefficient and Broaden Spectral Response Enhance The Power Generation.



TOPCON Multi Busbar Solar Half Cell Stronger Current Collection Ability



Higher power generation better LCOE



N-Type Cells ,Higher Resistance , Better Weak Light Performance ,Solar Gain $\geq 0.25\%$



N-type with very Lower LID

575W-590W


XP-MH72L-575W-590W

N-type Mono-crystalline
TOPCON Module

Comprehensive Products and System Certificates




PICC Product Insurance

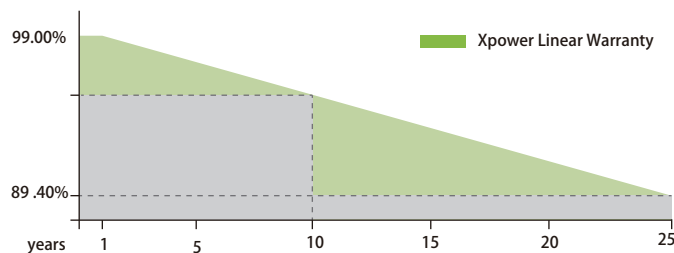


15 years Product quality & process guarantee

25 years Linear power guarantee


DWSIGH

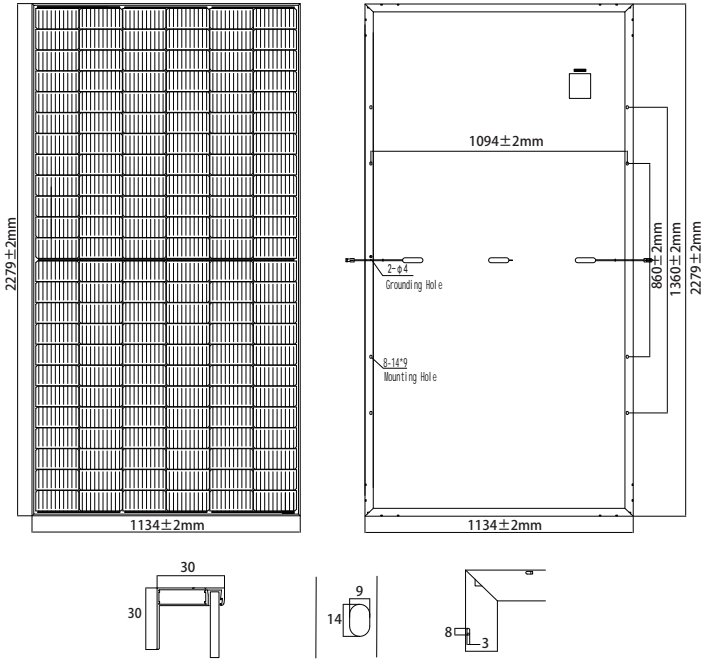

I-V CURVES OF PV MODULE (580w)

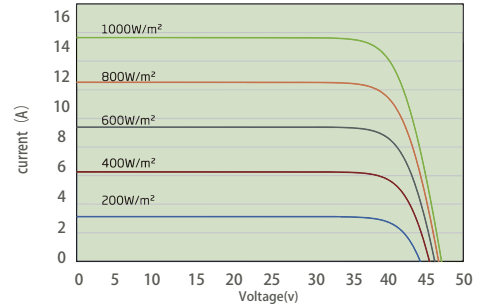

P-V CURVES OF PV MODULE (580w)

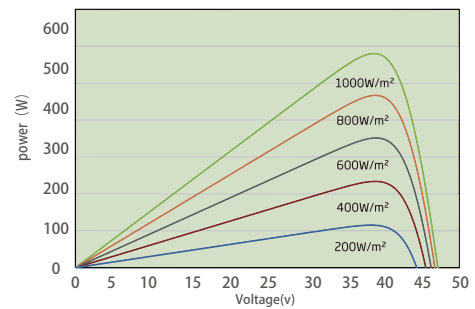

ELECTRIC CHARACTERISTICS

Model of modules	XP-MH72L-575W		XP-MH72L-580W		XP-MH72L-585W		XP-MH72L-590W	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Model of modules	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum power-Pmax(W)	575	432	580	436	585	440	590	444
Open Circuit voltage-Voc(V)	50.88	48.33	51.02	48.46	51.16	48.60	51.30	48.74
Short Circuit Current-ISC (A)	14.39	11.62	14.47	11.68	14.55	11.75	14.63	11.82
Maximum Power Voltage-Vmpp (V)	42.22	39.60	42.37	39.69	42.52	39.81	42.67	39.93
Maximum Power Current-Impp (A)	13.62	10.92	13.69	10.99	13.76	11.05	13.83	11.11
Module efficiency (%)	22.2%		22.4%		22.6%		22.8%	
Module efficiency w/m	222.5W		224.4W		226.4W		228.3W	
Maximum system voltage (V)	1500V							
Current operating temperature (°C)	-40°C~+85°C							

STC (Standard Testing Conditions): Irradiance 1000W/m², Cell Temperature 25 °C, Spectra at AM1.5 NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/5

MECHANICAL DATA

Solar Cells	TOPCON Monocrystalline 182 x 91mm
Number of cells	144 cells
Module Dimensions(L*W*H)	2279±2 x 1134±2 x 30±1mm
Glass	Tempered 3.2mm AR, High transmittance, Low iron
Encapsulant material	POE/EVA
Backsheet	White
Frame	Anodized Aluminium Alloy
Junction box	IP68/1500V/25A
Output wire	4.0mm², wire length:300mm
Connector	MC4 Compatible
Weight	27.2kg
Mechanical load	5400Pa

PACKAGING CONFIGURATION

Container	20GP	40HQ
Quantity/pallet	36 pieces	36 pieces
Pallet/container	5 pallets	20 pallets
Quantity/container	180 pieces	720 pieces

TEMPERATURE RATINGS

Nominal operating cell temperature	44±2°C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	+0.04%/°C



Scan QR Code to learn more
Email: info@xpowersolar.com

ADD:27th Floor, Brilliant Center, No.200 Huaining Road, Shushan District, Hefei, Anhui Province, China
Specifications included in this datasheet are subject to change without notice.