


3.12.1. Rooftop Safety Walkway (L-foot)

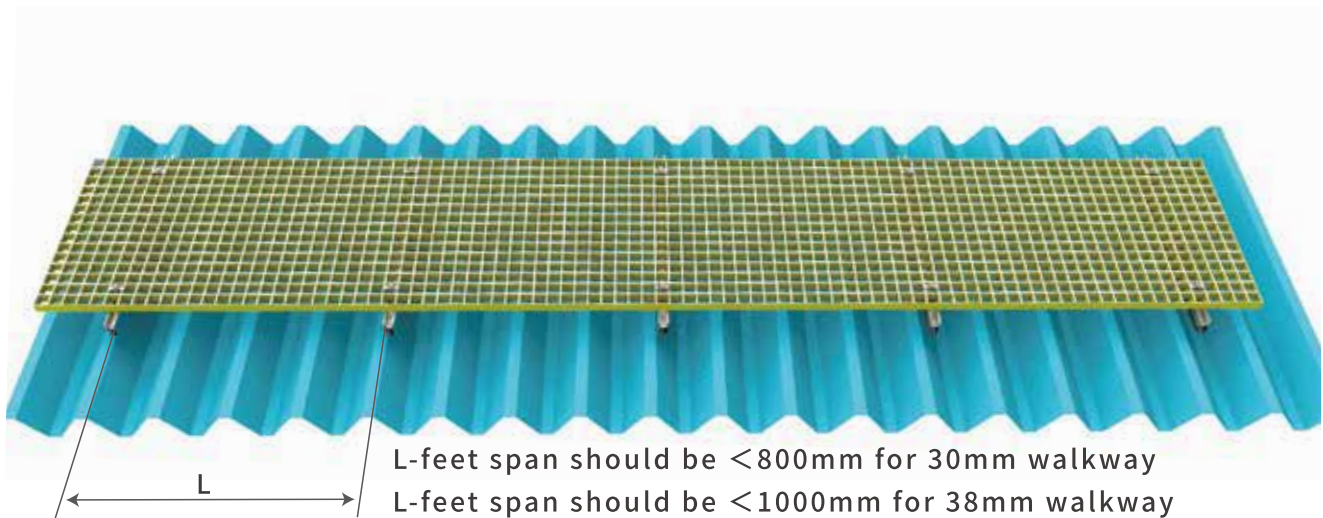

The walkway is installed on rooftops for installers and O&M operators to walk safely on the rooftops. It can effectively distribute the pedestrian load on the roof, protecting the roof from unnecessary damage and preventing people from falling.


Optional Specifications:

- 3660*600*30mm, 3660*500*30mm, 3660*400*30mm
- 3660*600*38mm, 3660*500*38mm, 3660*400*38mm



Features

1. Material: Fiberglass-Reinforced Plastics, Durable, Fireproof
2. Standard: JC/T 1026-2007
3. Load bearing capacity: 100kg/ m²
(30mm: L-foot span<800mm,38mm: L-foot span< 1000mm)
4. Multi-color options: Yellow, White, Black, Blue, Grey, Red, etc.

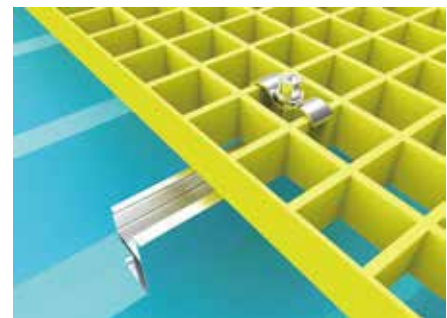

Components

